4061

AN IMPROVED TECHNOLOGY

SAFE

FLEXIBLE

PERFORMANT


VERSATILE






SAFE

VISIBILITY STABILITY



EXCELLENT ALL-ROUND VISIBILITY LOAD CENTE



LOAD CENTER OF GRAVITY INSID

PERFORMANT

dzwigi24.pl


LOAD CENTER





LIFTING CAPACITY OF 40T UNDER SPREADER AT A LOAD DISTANCE OF 1.80 M.

FIRST ROW




SECOND ROW



LIP TO 18T THREE HIGH IN THE SECOND BO

FLEXIBLE

SIDESHIFT \pm 800 MM



O EQUALIZE UNBALANCED BOXES



TO FACILITATE THE POSITIONING OF THE SPREADER

SLEWING ± 90°



TO REDUCE THE SPACE BETWEEN STACKS



TO APPROACH STACKS AT ANGLE OF

AXIAL POSITION






VERSATILE





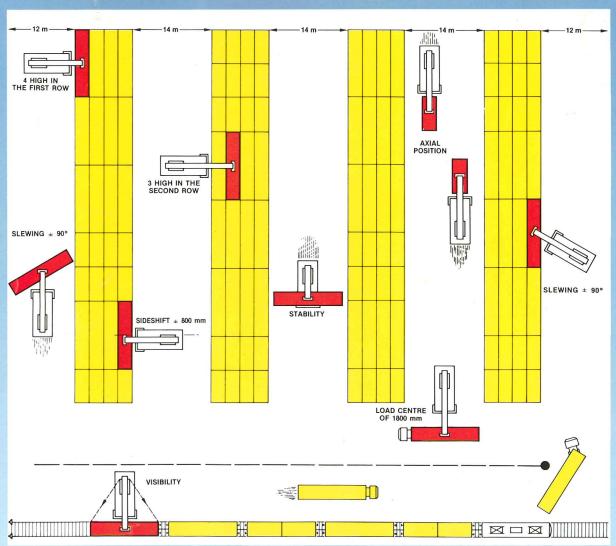



Head Office: La Saule - 71303 MONTCEAU-LES-MINES

Commercial Department:

11, Villa de saxe - 75007 PARIS Tel. : (1) 45.67.35.25 - Telex : 250 725 SIREN 726 820 236

dzwigi24.pl