

40 GMI

dzwigi24.pl



PPM

PPM 40 GMI

GMI PICK AND CARRY 60 TONNES !

The 40 GMI is a multipurpose handling and transport crane with a fixed telescopic boom for work in ports and industry. It can handle 20' to 40' containers up to 40 tonnes under its spreader (40 t 4-up in the first row and 18 t 3-up in the second) and can pick 60 t single loads with its hook attachment.


Weighing 52 t and powered by a 240 HP DEUTZ engine with powershift drive train, it travels at speeds of up to 28 km/h.

It incorporates mainly standard crane components which have given ample proof of their dependability. Any breakdown repairs can be carried out extra-fast.



ANTI-SWING SYSTEM

During pick-and-carry work, lengthwise container swing due to acceleration or braking is damped or entirely eliminated by two disc brakes at the boom head.

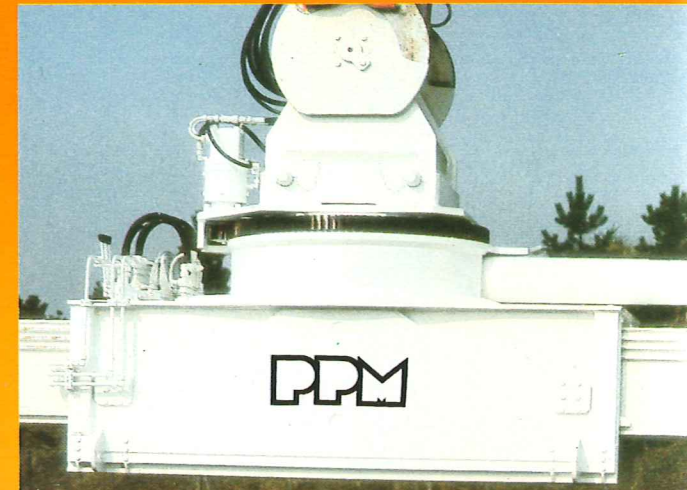

SMOOTH ACCURATE MANŒUVRING

Crane movements are remarkably smooth and precise thanks to the spreader's high speed slewing 90° on each side of the boom axis and its sideshift function.



CAB WITH ALL-ROUND VISION

Roomy functional cab in central position, with soundproofing, full protection and no blind spots through 360°.



EXTRA-PLUSH COMFORT

Adjustable upholstered seat pivoting with dashboard and steering wheel through 90°. Crane controls all located within easy reach. Extensive safety instrumentation.




ANTI-TIP SYSTEM

No risk of overloads. The operator cannot exceed the tipping limit due to a safety device featuring a rear axle mechanical weighing system triggering a micro-switch.




TELESCOPIC SPREADER

Spreader fully designed and manufactured by PPM. Fast hydraulic telescoping from 20' to 40'. Mechanical positioning and full 360° slew. Container snatched in just one second. All safety systems.

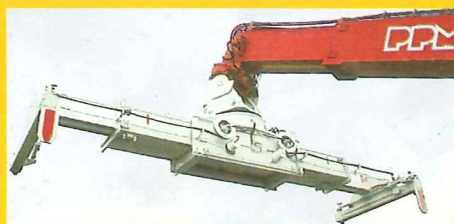


SAFETY AND SPEED

Snatching the container with the spreader takes one second flat. And it couldn't be safer. After fitting to the four corners, the twistlocks cannot be released while the container is suspended.

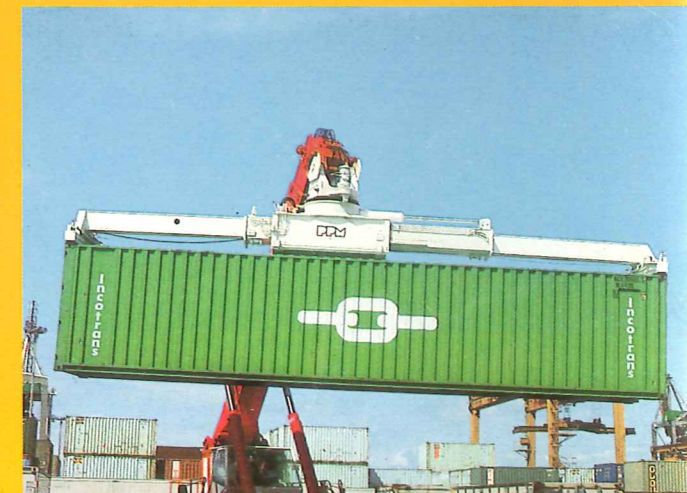

PERFECT BALANCE AT ALL TIMES

It is easy to keep the container perfectly balanced by using high-speed 800 mm sideshift on each side of the spreader axis.

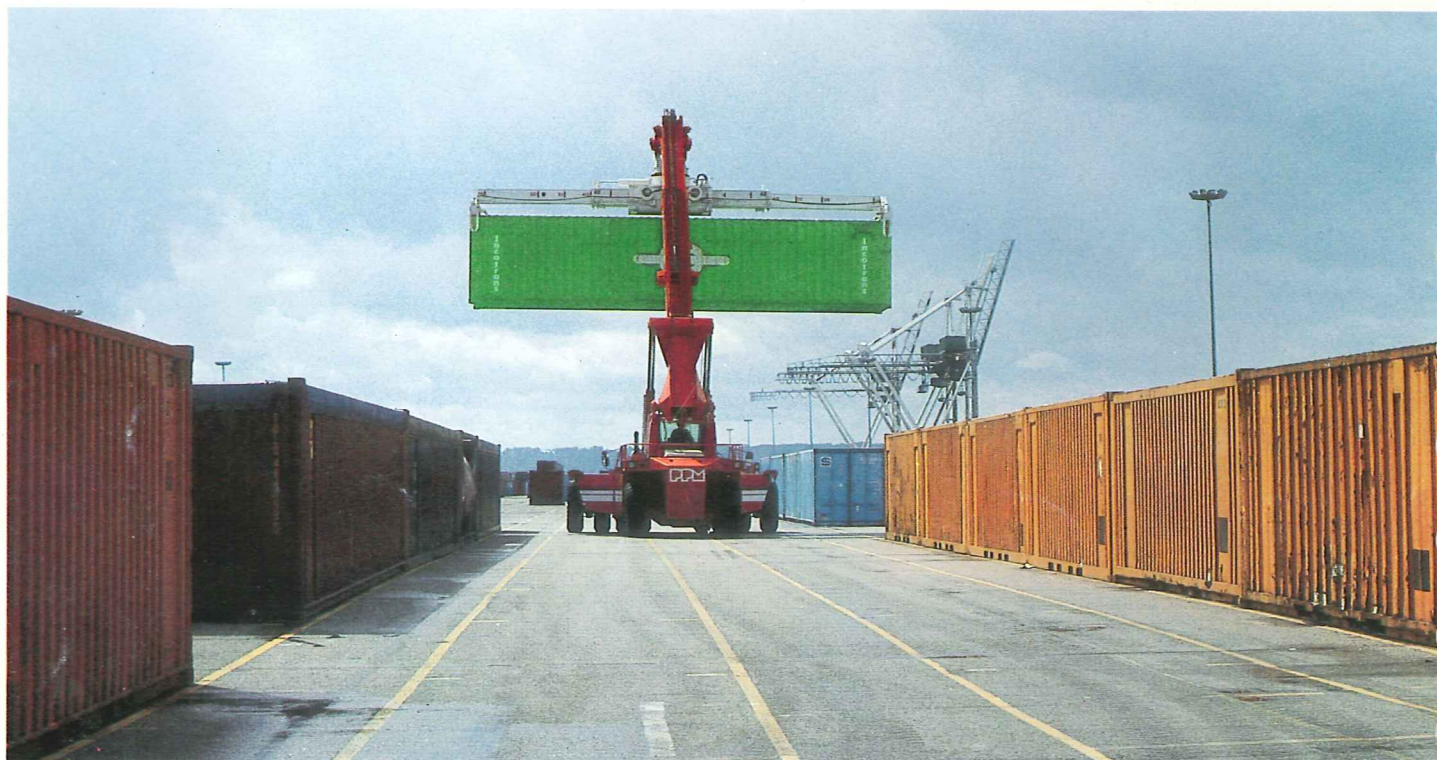

Head Office:
La Saule - 71303 MONTCEAU-LES-MINES
Commercial Department:
11, Villa de Saxe - 75007 PARIS
Tél. : (1) 567.35.25 - Telex : 250 725
SIREN 726 820 236

dzwigi24.pl